


Lap joint flanges

1500 lb/sq. in.

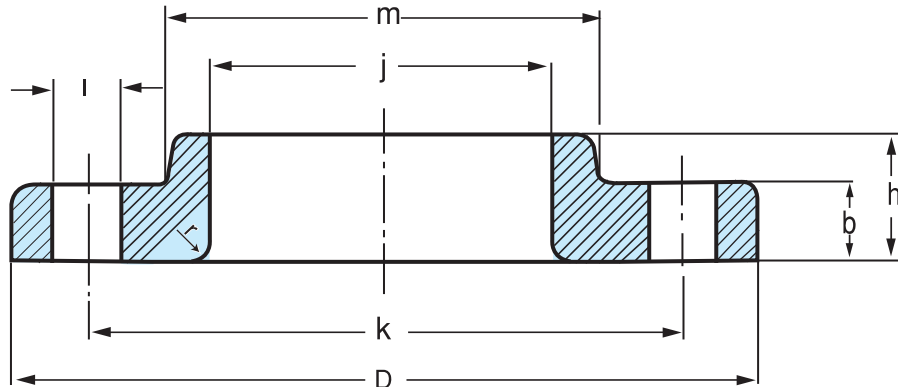

ASME B 16.5

Dimensions are in millimeters.

Ø	D	b	m	j	h	r	k	l	HOLES	Kg.
1/2"	120.6	22.3	38.1	22.3	38.1	3.0	82.5	22.3	4	1.7
3/4"	130.0	25.4	44.4	25.4	44.4	3.0	88.9	22.3	4	2.3
1"	149.3	28.4	52.3	28.4	52.3	3.0	101.6	25.4	4	3.4
1 1/4"	158.7	28.4	63.5	28.4	63.5	4.8	111.2	25.4	4	3.8
1 1/2"	177.8	31.7	69.8	31.7	69.8	6.4	123.9	28.4	4	5.2
2"	215.9	38.1	104.6	38.1	104.6	7.8	165.1	25.4	8	9.8
2 1/2"	244.3	41.1	123.9	41.1	123.9	7.8	190.5	28.4	8	13.6
3"	266.7	47.7	133.3	47.7	133.3	9.6	203.2	31.7	8	17.8
4"	311.1	53.8	162.0	53.8	162.0	11.1	241.3	35.0	8	27.5
5"	374.6	73.1	196.8	73.1	196.8	11.1	292.1	41.1	8	51.5
6"	393.7	82.5	228.6	82.5	228.6	12.7	317.5	38.1	12	62
8"	482.6	91.9	292.1	91.9	292.1	12.7	393.7	44.4	12	105
10"	584.2	107.9	368.3	107.9	368.3	12.7	482.6	50.8	12	179
12"	673.1	123.9	450.8	123.9	450.8	12.7	571.5	53.8	16	269
14"	749.3	133.3	495.3	133.3	495.3	12.7	635.0	60.4	16	365
16"	825.5	146.0	582.4	146.0	552.4	12.7	704.8	66.5	16	459
18"	914.4	162.0	596.9	162.0	596.9	12.7	774.7	73.1	16	598
20"	984.2	177.8	641.3	177.8	641.3	12.7	831.8	79.2	16	712
24"	1168.4	203.2	762.0	203.2	762.0	12.7	990.6	91.9	16	1090