


PN. 16 Welding Neck Flange Type 11

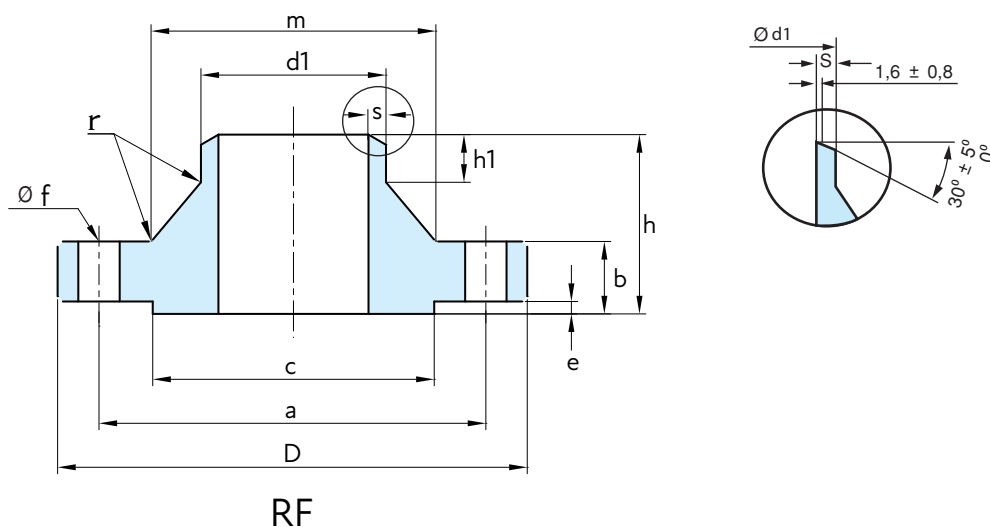

EN 1092-1

Dimensions are in millimeters.

DN	d ₁	D	b	c	h	m	h ₁	e	r	s	f	a	BOLT	HOLES	Kg.
10	17,2	90	16	40	35	28	6	2	4	2,0	14	60	M12	4	0,5
15	21,3	95	16	45	38	32	6	2	4	2,0	14	65	M12	4	1,0
20	26,9	105	18	58	40	40	6	2	4	2,3	14	75	M12	4	1,0
25	33,7	115	18	68	40	46	6	2	4	2,6	14	85	M12	4	1,0
32	42,4	140	18	78	42	56	6	2	6	2,6	18	100	M16	4	2,0
40	48,3	150	18	88	45	64	7	3	6	2,6	18	110	M16	4	2,0
50	60,3	165	18	102	45	74	8	3	6	2,9	18	125	M16	4	3,0
65	76,1	185	18	122	45	92	10	3	6	2,9	18	145	M16	8	3,0
80	88,9	200	20	138	50	105	10	3	6	3,2	18	160	M16	8	4,0
100	114,3	220	20	158	52	131	12	3	8	3,6	18	180	M16	8	4,5
125	139,7	250	22	188	55	156	12	3	8	4,0	18	210	M16	8	6,5
150	168,3	285	22	212	55	184	12	3	10	4,5	22	240	M20	8	7,5
200	219,1	340	24	268	62	235	16	3	10	6,3	22	295	M20	12	11,0
250	273,0	405	26	320	70	292	16	3	12	6,3	26	355	M24	12	16,5
300	323,9	460	28	378	78	344	16	4	12	7,1	26	410	M24	12	22,0
350	355,6	520	30	438	82	390	16	4	12	8,0	26	470	M24	16	32,0
400	406,4	580	32	490	85	445	16	4	12	8,0	30	525	M27	16	40,0
450	457,0	640	34	550	83	490	16	4	12	8,0	30	585	M27	20	50,5
500	508,0	715	36	610	84	548	16	4	12	8,0	33	650	M30	20	66,0
600	610,0	840	40	725	88	670	18	5	12	10,0	36	770	M33	20	104,0
700	711,0	910	40	795	104	755	18	5	12	10,0	36	840	M33	24	96,5
800	813,0	1025	41	900	108	855	20	5	12	12,5	39	950	M36	24	122,0
900	914,4	1125	48	1000	118	955	20	5	12	12,5	39	1050	M36	28	155,0
1000	1016,0	1255	59	1115	137	1058	22	5	16	12,5	42	1170	M39	28	233,0
1200	1219,0	1485	78	1330	160	1262	30	5	16	14,2	48	1390	M45	32	390,0
1400	1422,0	1685	84	1530	177	1465	30	5	16	16,0	48	1590	M45	36	495,0
1600	1626,0	1930	102	1750	204	1668	35	5	16	17,5	56	1820	M52	40	760,0
1800	1829,0	2130	110	1950	218	1870	35	5	16	20,0	56	2020	M52	44	929,0
2000	2032,0	2345	124	2150	238	2072	40	5	16	22,0	62	2230	M56	48	1185,0