


PN. 25 Welding Neck Flange Type 11

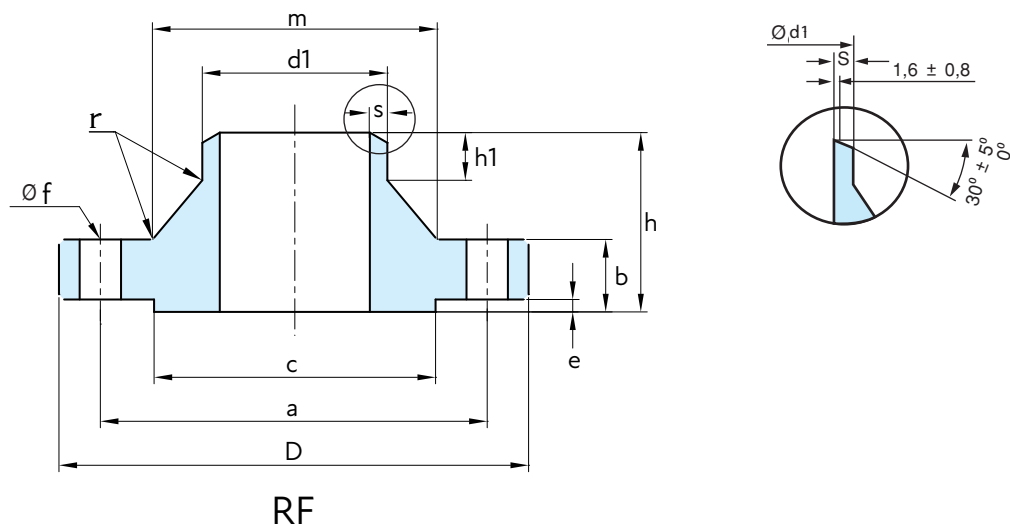

EN 1092-1

Dimensions are in millimeters.

DN	d ₁	D	b	c	h	m	h ₁	e	r	s	f	a	BOLT	HOLES	Kg.
10	17,2	90	16	40	35	28	6	2	4	2,0	14	60	M12	4	0,5
15	21,3	95	16	45	38	32	6	2	4	2,0	14	65	M12	4	1,0
20	26,9	105	18	58	40	40	6	2	4	2,3	14	75	M12	4	1,0
25	33,7	115	18	68	40	46	6	2	4	2,6	14	85	M12	4	1,0
32	42,4	140	18	78	42	56	6	2	6	2,6	18	100	M16	4	2,0
40	48,3	150	18	88	45	64	7	3	6	2,6	18	110	M16	4	2,0
50	60,3	165	20	102	48	75	8	3	6	2,9	18	125	M16	4	3,0
65	76,1	185	22	122	52	90	10	3	6	2,9	18	145	M16	8	4,0
80	88,9	200	24	138	58	105	12	3	8	3,2	18	160	M16	8	5,0
100	114,3	235	24	162	65	134	12	3	8	3,6	22	190	M20	8	6,5
125	139,7	270	26	188	68	162	12	3	8	4,0	26	220	M24	8	9,0
150	168,3	300	28	218	75	192	12	3	10	4,5	26	250	M24	8	11,5
200	219,1	360	30	278	80	244	16	3	10	6,3	26	310	M24	12	17,0
250	273,0	425	32	335	88	298	18	3	12	7,1	30	370	M27	12	24,0
300	323,9	485	34	395	92	352	18	4	12	8,0	30	430	M27	16	31,5
350	355,6	555	38	450	100	398	20	4	12	8,0	33	490	M30	16	48,0
400	406,4	620	40	505	110	452	20	4	12	8,8	36	550	M33	16	63,0
450	457,0	670	46	555	110	500	20	4	12	8,8	36	600	M33	20	75,5
500	508,0	730	48	615	125	558	20	4	12	10,0	36	660	M33	20	96,5
600	610,0	845	48	720	125	660	20	5	12	11,0	39	770	M36	20	121,0
700	711,0	960	50	820	129	760	20	5	12	14,2	42	875	M39	24	155,0
800	813,0	1085	53	930	138	864	22	5	12	16,0	48	990	M45	24	205,0
900	914,4	1185	57	1030	148	968	24	5	12	17,5	48	1090	M45	28	249,0
1000	1016,0	1320	63	1140	160	1070	24	5	16	20,0	56	1210	M52	28	338,0