


PN. 40 Welding Neck Flange Type 11

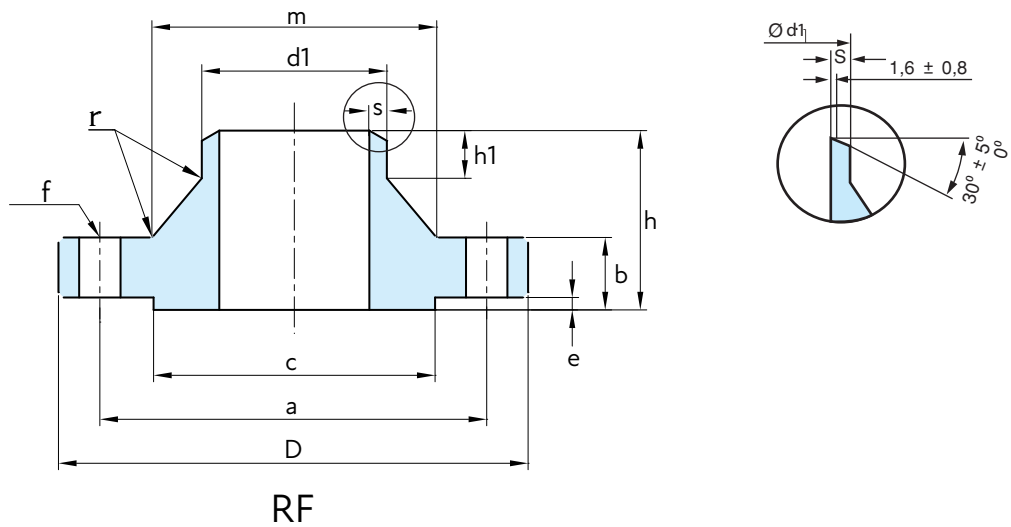

EN 1092-1

Dimensions are in millimeters.

DN	d ₁	D	b	c	h	m	h ₁	e	r	s	f	a	BOLT	HOLES	Kg.
10	17,2	90	16	40	35	28	6	2	4	2,0	14	60	M12	4	0,5
15	21,3	95	16	45	38	32	6	2	4	2,0	14	65	M12	4	1,0
20	26,9	105	18	58	40	40	6	2	4	2,3	14	75	M12	4	1,0
25	33,7	115	18	68	40	46	6	2	4	2,6	14	85	M12	4	1,0
32	42,4	140	18	78	42	56	6	2	6	2,6	18	100	M16	4	2,0
40	48,3	150	18	88	45	64	7	3	6	2,6	18	110	M16	4	2,0
50	60,3	165	20	102	48	75	8	3	6	2,9	18	125	M16	4	3,0
65	76,1	185	22	122	52	90	10	3	6	2,9	18	145	M16	8	4,0
80	88,9	200	24	138	58	105	12	3	8	3,2	18	160	M16	8	5,0
100	114,3	235	24	162	65	134	12	3	8	3,6	22	190	M20	8	6,5
125	139,7	270	26	188	68	162	12	3	8	4,0	26	220	M24	8	9,0
150	168,3	300	28	218	75	192	12	3	10	4,5	26	250	M24	8	11,5
200	219,1	375	34	285	88	244	16	3	10	6,3	30	320	M27	12	21,0
250	273,0	450	38	345	105	306	18	3	12	7,1	33	385	M30	12	34,0
300	323,9	515	42	410	115	362	18	4	12	8,0	33	450	M30	16	47,5
350	355,6	580	46	465	125	408	20	4	12	8,8	36	510	M33	16	69,0
400	406,4	660	50	535	135	462	20	4	12	11,0	39	585	M36	16	98,0
450	457,0	685	57	560	135	500	20	4	12	12,5	39	610	M36	20	105,0
500	508,0	755	57	615	140	562	20	4	12	14,2	42	670	M39	20	130,5
600	610,0	890	72	735	150	666	20	5	12	16,0	48	795	M45	20	211,5