


PN. 100 Welding Neck Flange Type 11

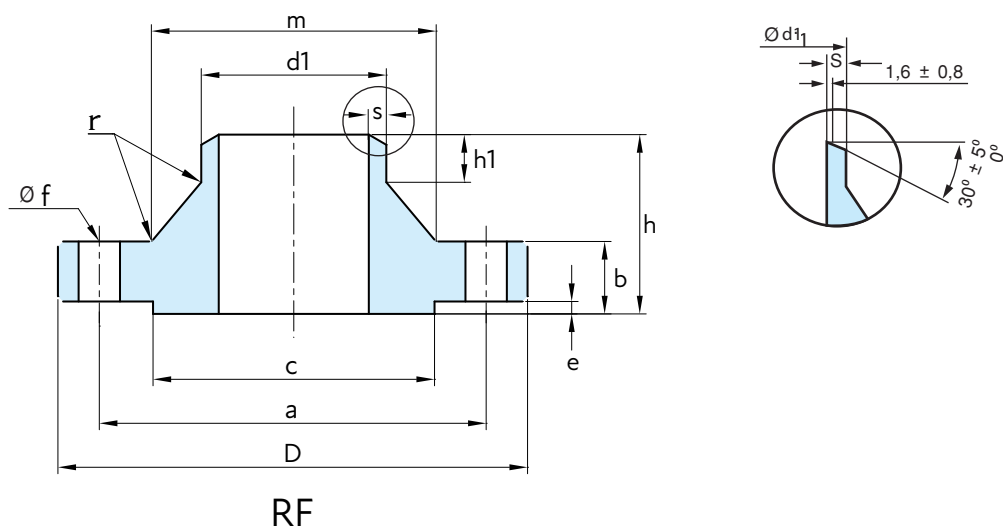

EN 1092-1

Dimensions are in millimeters.

DN	d ₁	D	b	c	h	m	h ₁	e	r	s	f	a	BOLT	HOLES	Kg.
10	17,2	100	20	40	45	32	6	2	4	2,0	14	70	M12	4	1,0
15	21,3	105	20	45	45	34	6	2	4	2,0	14	75	M12	4	1,0
20	26,9	130	22	58	48	42	8	2	4	3,2	18	90	M16	4	2,0
25	33,7	140	24	68	58	52	8	2	4	3,6	18	100	M16	4	2,5
32	42,4	155	24	78	60	62	8	2	6	3,6	22	110	M20	4	3,0
40	48,3	170	26	88	62	70	10	3	6	3,6	22	125	M20	4	4,0
50	60,3	195	28	102	68	90	10	3	6	4,0	26	145	M24	4	6,0
65	76,1	220	30	122	76	108	12	3	6	4,0	26	170	M24	8	7,5
80	88,9	230	32	138	78	120	12	3	8	5,0	26	180	M24	8	9,0
100	114,3	265	36	162	90	150	12	3	8	5,6	30	210	M27	8	13,0
125	139,7	315	40	188	105	180	12	3	8	6,3	33	250	M30	8	21,0
150	168,3	355	44	218	115	210	12	3	10	8,0	33	290	M30	12	28,0
200	219,1	430	52	285	130	278	16	3	10	8,8	36	360	M33	12	50,0
250	273,0	505	60	345	157	340	18	3	12	10,0	39	430	M36	12	81,0
300	323,9	585	68	410	170	400	18	4	12	12,5	42	500	M39	16	118,0
350	355,6	655	74	465	189	460	20	4	12	14,2	48	560	M45	16	167,0
400	406,4	715	*	535	*	*	*	4	*	16,0	48	620	M45	16	*
500	508,0	870	*	615	*	*	*	4	*	*	56	760	M52	20	*

* To be specified by the client