


PN. 63 Welding Neck Flange Type 11

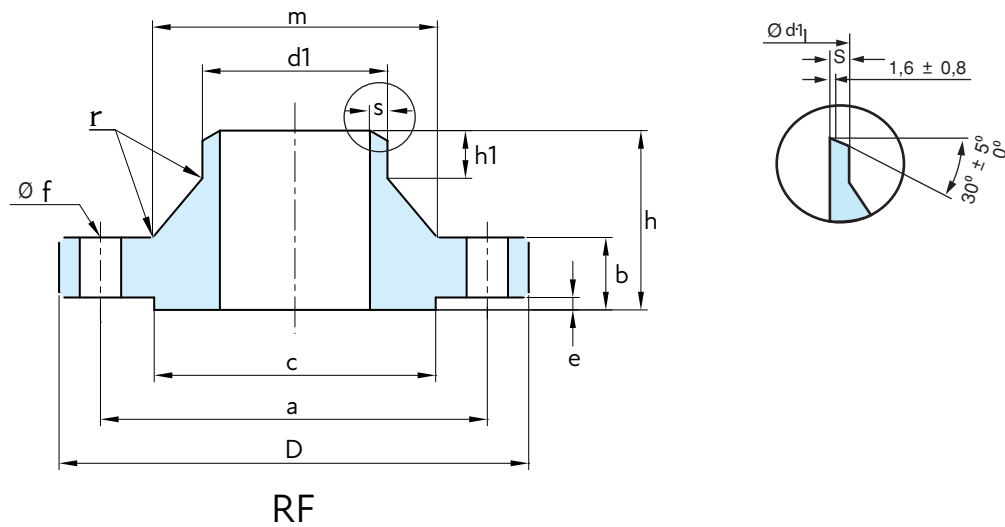

EN 1092-1

Dimensions are in millimeters.

DN	d ₁	D	b	c	h	m	h ₁	e	r	s	f	a	BOLT	HOLES	Kg.
10	17,2	100	20	40	45	32	6	2	4	2,0	14	70	M12	4	1,0
15	21,3	105	20	45	45	34	6	2	4	2,0	14	75	M12	4	1,0
20	26,9	130	22	58	48	42	8	2	4	2,6	18	90	M16	4	2,0
25	33,7	140	24	68	58	52	8	2	4	2,6	18	100	M16	4	2,5
32	42,4	155	24	78	60	62	8	2	6	2,9	22	110	M20	4	3,0
40	48,3	170	26	88	62	70	10	3	6	2,9	22	125	M20	4	4,0
50	60,3	180	26	102	62	82	10	3	6	4,0	22	135	M20	4	4,5
65	76,1	205	26	122	68	98	12	3	6	4,0	22	160	M20	8	5,5
80	88,9	215	28	138	72	112	12	3	8	4,5	22	170	M20	8	6,5
100	114,3	250	30	162	78	138	12	3	8	4,5	26	200	M24	8	9,5
125	139,7	295	34	188	88	168	12	3	8	5,6	30	240	M27	8	14,5
150	168,3	345	36	218	95	202	12	3	10	6,3	33	280	M30	8	21,5
200	219,1	415	42	285	110	256	16	3	10	7,1	36	345	M33	12	34,0
250	273,0	470	46	345	125	316	18	3	12	8,8	36	400	M33	12	48,0
300	323,9	530	52	410	140	372	18	4	12	11,0	36	460	M33	16	67,5
350	355,6	600	56	465	150	420	20	4	12	12,5	39	525	M36	16	97,5
400	406,4	670	60	535	160	475	20	4	12	14,2	42	585	M39	16	129,0
500	508,0	800	*	615	*	*	*	4	12	*	48	705	M45	20	*

* To be specified by the client